

The TracX harness is one of Tractel®'s most comfortable harness. The TracX pad provides extra comfort and minimizes weight on shoulders. The breathable lining keeps you dry and comfortable. Its adjustable leg, shoulder, chest and sub-pelvic straps can be adjusted to a perfect fit for maximum comfort. Its snap release lanyard keeper design keeps the lanyard arm out of the way when not in use and minimizes the risk of tripping.

The TracX harness also features models which include a removable padded tool belt. It combines the versatility of adjustment that offers support and the capability to insert tool pouches. The belt has a foam backing for comfort and support, which makes it the ideal choice for height safety work within construction environments that involve work positioning applications. Optional leg pads can be added to any TracX harness model for extra comfort.

For further information, refer to the "Use and Maintenance Instructions" for harnesses and lanyards.

FEATURES

- Adjustable dorsal D-ring
- Adjustable chest strap
- Snap release lanyard keepers on both shoulder straps
- Available with auto-buckle or tongue and buckle legs
- Adjustable sub-pelvic strap (auto-buckle models)
- Accommodates tool belt up to 4 in. (102 mm) wide
- Models featuring tool belt includes a rigid removable belt that accommodates tool pouches
- Fall indicators / inspection tag / serial number
- Available with optional leg pads (codes ending with "/XT")
- Two colors: blue shoulder straps and black leg straps

APPLICATIONS

- Fall arrest
- Optional:
 - work positioning
 - retrieval
 - ladder climbing
 - suspension

APPLICABLE STANDARDS

- CSA Z259.10-06
- ANSI Z359.1-2007
- ANSI A10.32-2012
- OSHA 1926



SIZES

- One size: AU732/X (fits most)
- Small: AU732**S**/X
- Medium: AU732**M**/X
- Large: AU732**L**/X
- X-large: AU732**XL**/X
- XX-large: AU732**XXL**/X

**Models without belt are available in S, one size, XL and XXL, models with belt are available in S, M, L, XL and XXL.*

BELT SIZES

Small	31–39 in. (78–100 cm)
Medium	35–43 in. (88–110 cm)
Large	38–46 in. (98–120 cm)
X-large	44–52 in. (108–130 cm)

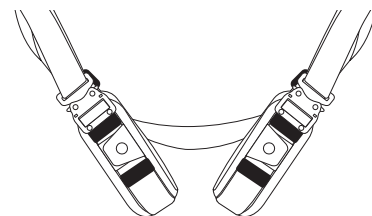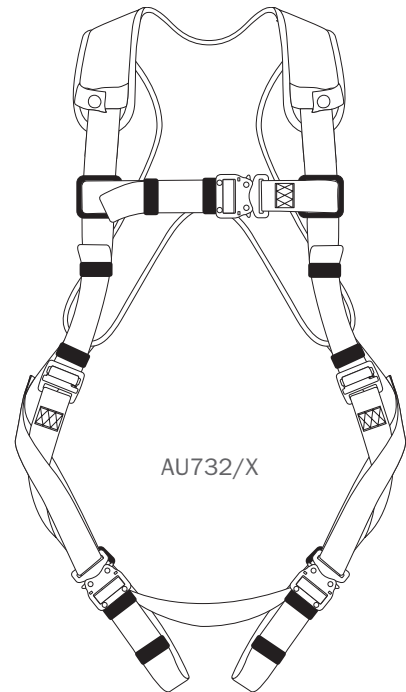

AU732/XT
(with leg pads)


AVAILABLE MODELS

AD732/X

AD732/XT (with leg pads)



- Tongue and buckle legs
- TracX pad
- Five-point adjustment
- Dorsal D-ring
- Available sizes:
S, one size, XL and XXL

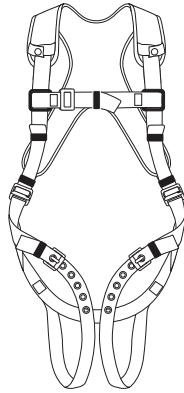


AU732/X

AU732/XT (with leg pads)



- Auto-lock buckles
- TracX pad
- Adjustable sub-pelvic strap
- Seven-point adjustment
- Dorsal D-ring
- Available sizes:
S, one size, XL and XXL

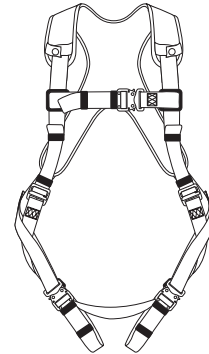


AD742/X

AD742/XT (with leg pads)



- Tongue and buckle legs
- TracX pad
- Side-positioning D-rings
- Five-point adjustment
- Dorsal D-ring
- Available sizes:
S, one size, XL and XXL

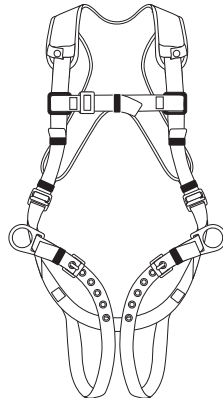


AU742/X

AU742/XT (with leg pads)



- Auto-lock buckles
- TracX pad
- Side-positioning D-rings
- Adjustable sub-pelvic strap
- Seven-point adjustment
- Dorsal D-ring
- Available sizes:
S, one size, XL and XXL

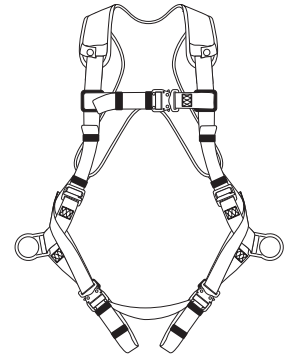


AU7132/X

AU7132/XT (with leg pads)



- Auto-lock buckles
- TracX pad
- Upper sternum D-ring
- Side-positioning D-rings
- Fixed chest strap
- Five-point adjustment
- Dorsal D-ring
- Available sizes:
S, one size, XL and XXL

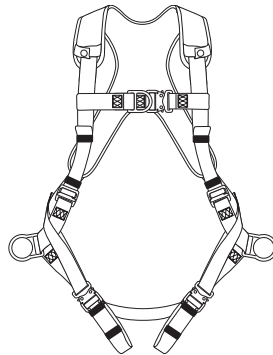


AU7112/X

AU7112/XT (with leg pads)



- Auto-lock buckles
- TracX pad
- Upper sternum D-ring
- Side-positioning D-rings
- Frontal attachment
- Fixed chest strap
- Five-point adjustment
- Dorsal D-ring
- Available sizes:
S, one size, XL and XXL

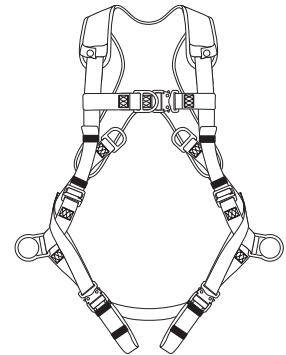


AVAILABLE MODELS (continued)

EBD95L/X

EBD95L/XT (with leg pads)



- Tongue & buckle legs
- TracX pad
- Padded back support belt with side D-rings
- Removable tool belt accommodates pouches
- Five-point adjustment
- Dorsal D-ring
- Available sizes: S, M, L, XL and XXL

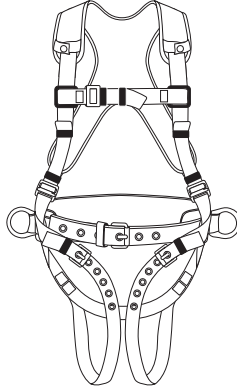


EBU95L/X

EBU95L/XT (with leg pads)



- Auto-lock buckles
- TracX pad
- Padded back support belt with side D-rings
- Removable tool belt accommodates pouches
- Adjustable sub-pelvic strap
- Seven-point adjustment
- Dorsal D-ring
- Available sizes: S, M, L, XL and XXL

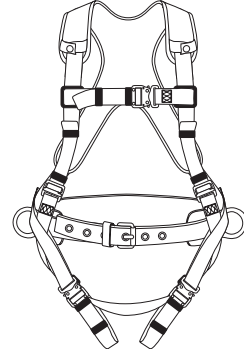

PARTS	SPECIFICATIONS
WEBBING	High tenacity polyester Width: 1¾ in. (45 mm) Thickness: ¼ in. (1.4 mm) Tensile strength: 5,700 lbs. (25.4 kN) Webbing is heat-cut to prevent fraying.
TONGUE AND BUCKLE WEBBING (LEGS)	High tenacity polyester Width: 1¾ in. (45 mm) Thickness: ⅜ in. (3 mm) Tensile strength: 9,000 lbs. (40 kN) Webbing is heat-cut to prevent fraying.
STITCHING	Harness is lock-stitched. Thread: #138 polyester Belt is lock-stitched. Thread: #207 polyester
BACK AND SIDE D-RINGS	Plating: zinc dichromate Proof-loaded 100% at 3,600 lbs. (16 kN) Tensile strength: 5,000 lbs. (22.2 kN)
AUTO-BUCKLE	Plating: zinc dichromate Minimum tensile strength: 4,000 lbs. (17.8 kN) Function inspected: 100%
SLIDING BAR ADJUSTER	Plating: zinc dichromate Tensile strength: 4,000 lbs. (17.8 kN)
TRACX PAD	Foam: closed cell EVA 80 Outer fabric: polyester Thickness: ⅝ in. (8 mm)
LEG PADS	Thermal formed foam laminate EVA 80 Outer fabric: polyester Thickness: ¼ in. (5 mm)
PLASTIC AND ELASTIC RETAINERS	Each webbing strap with a free end has keeper loops.
TOOL BELT WEBBING	High tenacity polyester Width: 1¾ in. (45 mm) Thickness: ⅜ in. (3 mm) Tensile strength: 10,000 lbs. (44.5 kN) Webbing is heat-cut to prevent fraying.
BACK SUPPORT FOAM	Closed cell foam laminate Thickness: ⅝ in. (8 mm)
TONGUE AND BUCKLE	Plating: zinc dichromate Tensile strength: 4,000 lbs. (17.8 kN)
GROMMETS	#2 spur brass
CAPACITY	386 lbs. (175 kg), one person

Specifications are subject to change without notice. Images are for illustrative purposes only.